


Bulkhead Male Connector

Order Number	Outer Diameter	size					
		A	D	E	F	Hole Size	Maximum Thickness
Bulkhead Male Connector							
Inch							
SS-BMC-2-2	1/8"X1/8"	1.83	0.50	0.09	1/2	21/64	0.50
SS-BMC-4-2	1/4"X1/8"	1.95	0.60	0.19	5/8	29/64	0.40
SS-BMC-4-4	1/4"X1/4"	2.13					
SS-BMC-6-4	3/8"X1/4"	2.26	0.66	0.28	3/4	37/64	0.44
SS-BMC-6-6	3/8"X3/8"	2.26					
SS-BMC-6-8	3/8"X1/2"	2.51					
SS-BMC-8-6	1/2"X3/8"	2.49	0.90	0.38	15/16	49/64	0.50
SS-BMC-8-8	1/2"X1/2"	2.71					
SS-BMC-12-12	3/4"X3/4"	3.00	0.96	0.62	1 3/16	1 1/64	0.66
SS-BMC-16-16	1"X1"	3.67	1.23	0.88	1 5/8	1 21/64	0.75
Metric							
SS-BMC-6M-2	6mmX1/8"	49.5	15,3	4.8	16	11.5	10.2
SS-BMC-6M-4	6mmX1/4"	53.6					
SS-BMC-12M-8	12mmX1/2"	68.8	22.8	9.5	24	19.5	12.7

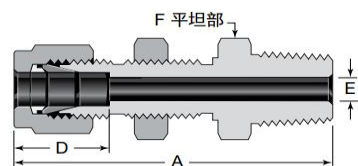

For more information, please contact us
 Add: 221 Haikou Road, Qingdao, China
 Tel: +86-532-85930025
 Email: info@maxwill-ind.com
<https://www.maxwill-ind.com/>